

Vorsprühssets

Niederdruckinjektoren



Injektor mit Dosierung. Saugschlauch 1 m. Ansaugfilter ST-31. Min. 2 bar - max. 10 bar




Min. 2 bar - max. 10 bar. Durchfluss bei 2 bar ca. 150 l/h. Zumischung ca. 0 - 11,5 %

R+M Nr.	⊕	⊖
545 101	3/4" IG	3/8" IG

R+M Nr.	TYP	D	⊕	⊖
200 060 700	1	ST-60.1	1,6 3/8" AG	3/8" IG
200 060 710	1	ST-60.1	1,8 3/8" AG	3/8" IG
050 000 370	2	O-Ring		
200 061 500	3	Dosierung	Tülle ∅ 6 mm	

Kugelhähne


Standard

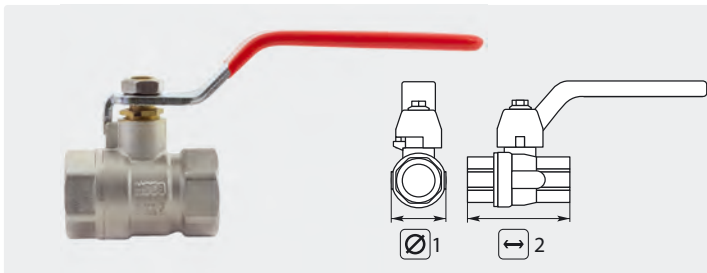

Messing vernickelt. Kugel verchromt.
Max. 25 bar / 60 °C

R+M Nr.	⊕	∅ 1	↔ 2	SW
705 10	1/4" IG	23,5	40	19
705 20	3/8" IG	23,5	40	19
705 30	1/2" IG	28,0	46	24
705 40	3/4" IG	34,7	53	30
705 50	1" IG	42,5	64	37

Kugelhähne mit Flügelgriff

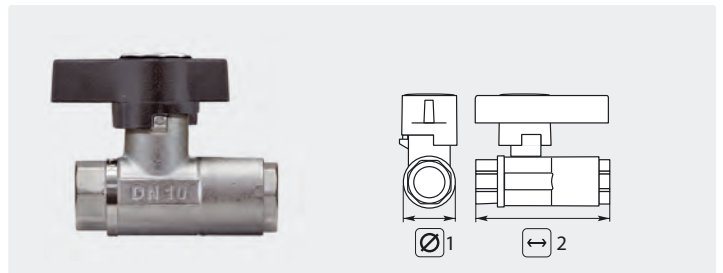

Messing vernickelt. Kugel verchromt.
Max. 210 bar / 80 °C

R+M Nr.	⊕	∅ 1	↔ 2
705 383 82	3/8" IG	30 mm	75 mm
705 121 22	1/2" IG	36 mm	85 mm