

Höchstdruckumlaufventile

VB60/600



☉ = Eingang 1/2" IG, ☉ = Ausgang 1/2" IG, [BP] = Bypass 1/2" IG.

Max. 600 bar / 90 °C

R+M Nr.	☉
532 260 0	60l/min

H560



Edelstahl. [BP] = Bypass 1/2" IG. [MN] = Manometer 1/4" IG.

Max. 500 bar / 80 °C / 60 l/min

R+M Nr.	☉	☉
100 005 60	1/2" IG	1/2" IG

BKX



[BP] = Bypass 3/4" IG. Max. 600 bar / 80 °C / 60 l/min

R+M Nr.	☉	☉
010 000 02	1/2" IG	1/2" IG

VB60/600



☉ = Eingang 1/2" IG, ☉ = Ausgang 1/2" IG. [BP] = Bypass 1/2" IG. Umlaufventil mit Mikroschalter (IP55) und Kabel 950 mm.

Max. 600 bar / 90 °C

R+M Nr.	☉
532 265 0	60l/min

Höchstdrucksicherheitsventile

VS 500



☉ 222 mm. Max. 500 bar

R+M Nr.	[BP]	☉
532 520 0	3/8" IG	1/2" IG

S3




☉ 110 mm. Max. 700 bar

R+M Nr.	☉
010 002 15	1/2" AG

ST-230-700 Druckbegrenzungsventil


Plombe möglich

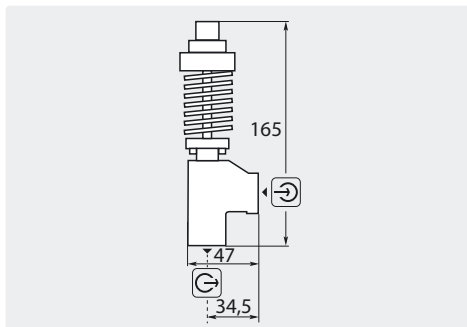

☉ 165 mm. Max. 40 l/min / 60 °C. Kurzfristig max. 85 °C

R+M Nr.	☉	☉	[P]
200 230 700	3/8" IG	1/4" IG	200-700

Jetbreaker

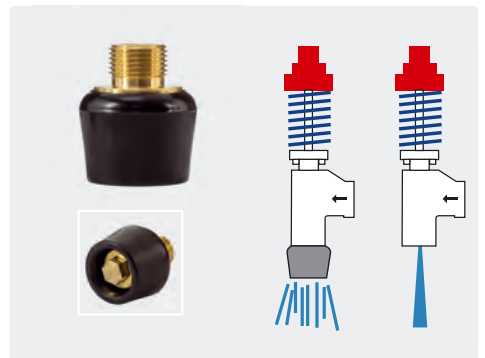


☉ 27 mm

R+M Nr.	☉
200 230 410	3/8" AG

ST-220

Plombe möglich

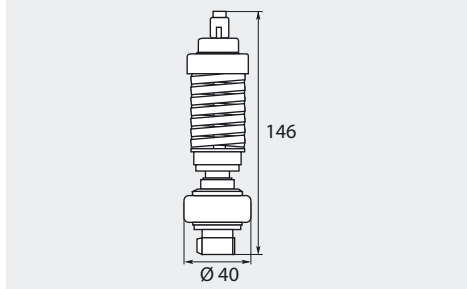

☉ 146 mm. Max. 700 bar / 50 l/min / 85 °C

R+M Nr.	☉
200 220 500	1/2" AG

