

Schlauchführungssystem . Stahl verzinkt . 32 x 30 mm Profil

Schlauchaufhänger Kunststoff

∅ 10-16 mm



Schrauben Stahl verzinkt. Für Profil 32 x 30 mm. - 30 °C - + 60 °C

R+M Nr.	↔	R
107 000 050	70	80

∅ 17-25 mm



Schrauben Stahl verzinkt. Für Profil 32 x 30 mm. - 30 °C - + 60 °C


R+M Nr.	↔	R
107 000 051	100	125

∅ 26-36 mm



Schrauben Stahl verzinkt. Für Profil 32 x 30 mm. - 30 °C - + 60 °C

R+M Nr.	↔	R
107 000 052	140	160

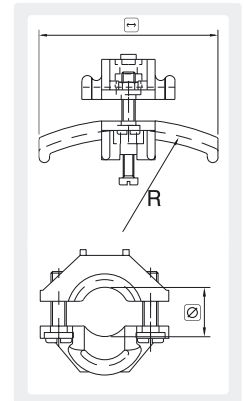

Endklemme



Kunststoff / Stahl verzinkt. - 30 °C - + 60 °C. Für Profil 32 x 30

R+M Nr.
107 000 779

Endstopper



Stahl verzinkt. Gummipuffer. - 30 °C - + 60 °C. Für Profil 32 x 30

R+M Nr.
107 408 0