

Kombidüsenträger

ST-56 Kugelkombidüsen



R+M Nr.	☺	☺	M
200 056 500	2 x 1/4" IG	1/4" IG	Messing

ST-56 Kugelkombidüsen



R+M Nr.	☺	☺
656 51	2 x 1/4" IG	M18 IG

ST-52 Variopress




R+M Nr.	☺	☺
200 052 500	1/4" IG	1/4" AG

ST-58 Umschaltventile




R+M Nr.	☺	☺
200 058 600	1/4" IG	1/4" IG

Funktionsprinzip einer Kugelkombidüse

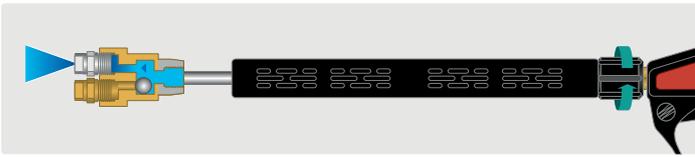

Hochdruckphase

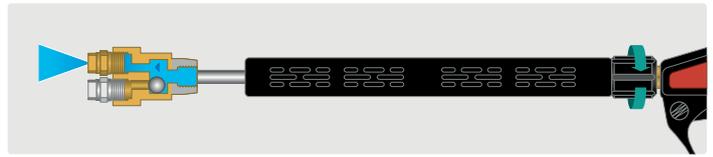

Niederdruckphase

Mini Schwallregeldüsen



R+M Nr.	☺	☺
657 20	1/4" IG	1/4" IG

R+M Schwallregeldüsen




R+M Nr.	☺	☺
657 30	1/4" IG	1/4" IG

ST-51 Schwallregeldüsen




R+M Nr.	☺	☺
200 051 530	1/4" IG	1/4" IG

Funktionsprinzip einer Schwallregeldüse

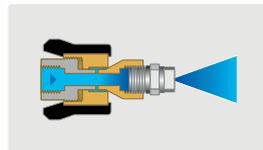


Hochdruckphase

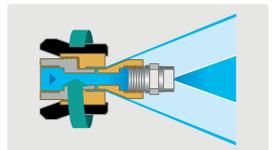

Niederdruckphase

Konfektionierte Lanzen

Unterbodenlanzen

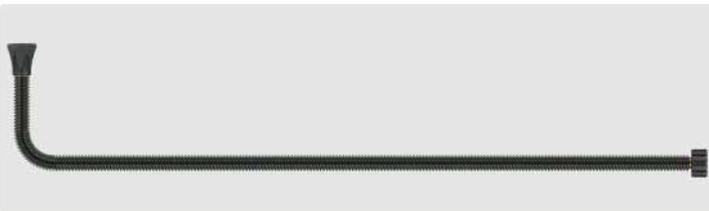

Lanze mit Düsenchutz ST-10 ohne Hochdruckdüse. Höhe 190 mm

R+M Nr.	☺	☺	☺	M
515 01	1/4" IG NPT	900 mm	HV M22	Stahl verzinkt

WC / Dachrinnenlanzen



Lanze mit Schwallregeldüse ohne Hochdruckdüse

R+M Nr.	☺	☺	☺	M
513 112	1/4" IG	500 mm	HV M22	Stahl verzinkt

Symbole ☺ Eingang ☺ Ausgang ☺ Länge ISO Isolierung D Düse