

Saugerturbinen

Gilt für alle Nass- & Trockenturbinen

- » Doppelt kugelgelagert
- » Doppelte Isolierung
- » Isolierungsstufe "B"



1-stufig. 230 V / 50 Hz.  
Kabeltyp 3 beigelegt

R+M Nr.	TYP	W	I	TI	Ø
262 101	Universal	1.000	144	45	144




2-stufig. 230 V / 50 Hz.  
Kabeltyp 1 beigelegt

R+M Nr.	TYP	W	I	TI	Ø
262 080 102	361	800	163	72	144
262 100 102	7568	1.000	170	72	144
262 120 102	7778-5	1.200	178	72	144
262 120 302	7363-12	1.200	163	72	144
262 120 702	586-2	1.200	170	67	144

Mit Thermosicherung

R+M Nr.	TYP	W	I	TI	Ø
262 120 202 *	7778-4	1.200	178	72	144
262 140 102 *	7788	1.400	176	72	144

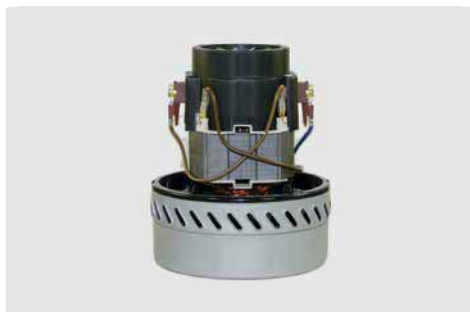

2-stufig. 230 V / 50 Hz.  
Kabeltyp 2 beigelegt

R+M Nr.	TYP	W	I	TI	Ø
262 120 502	A210	1.200	181	67	144



1-stufig. 230 V / 50 Hz.  
Kabeltyp 2 beigelegt

R+M Nr.	TYP	W	I	TI	Ø
262 110 101	061200219	1.100	133	49	148



1-stufig. 230 V / 50 Hz.  
Kabel vorinstalliert

R+M Nr.	TYP	W	I	TI	Ø
262 110 001	061200043	1.100	136	50	144



2-stufig. 230 V / 50 Hz.  
Kabeltyp 2 beigelegt

R+M Nr.	TYP	W	I	TI	Ø
262 100 202	BDS 10302	1.000	167	70	144
262 120 602	BDS 12382	1.200	176	70	144



2-stufig. 24 V.  
Kabel vorinstalliert

R+M Nr.	TYP	W	I	TI	Ø
262 050 230	069103006	500	171	68	144



2-stufig. 230 V / 50 Hz.  
Kabeltyp 3 beigelegt

R+M Nr.	TYP	W	I	TI	Ø
262 120	069203004	1.200	176	67	144



2-stufig. 230 V / 50 Hz.  
Kabel vorinstalliert

R+M Nr.	TYP	W	I	TI	Ø
262 110 102	116 110-01	1.100	170	69	145



2-stufig. 230 V / 50 Hz.  
Kabel vorinstalliert

R+M Nr.	TYP	W	I	TI	Ø
262 120 802	Universal	1.200	170	66	144



2-stufig. 230 V / 50 Hz. Kabel vorinstalliert.  
TYP Universal

R+M Nr.	VPE	W	I	TI	Ø
262 120 902	1	1.200	172	66	148
262 120 902 006	6	1.200	172	66	148