

Muffen reduziert

Innengewinde : Innengewinde



Messing

IG : IG
1/8" : 1/4"
1/4" : 3/8"
1/4" : 1/2"
3/8" : 1/2"

R+M Nr.	P	I
518 20	400 bar	26 mm
518 60	400 bar	28 mm



Edelstahl

R+M Nr.	P	I
040 001 023	400 bar	26 mm



Messing vernickelt

R+M Nr.	P	I
518 524	50 bar	24 mm
518 534	50 bar	26 mm

Muffen

Innengewinde : Innengewinde



Sechskant. Messing

IG : IG
1/8" : 1/8"
1/4" : 1/4"
3/8" : 3/8"
1/2" : 1/2"
3/4" : 3/4"

R+M Nr.	P	I
518 10	400 bar	22 mm
518 30	400 bar	26 mm
518 40	300 bar	26 mm
518 50	250 bar	30 mm
518 55	150 bar	36 mm



Sechskant. Edelstahl

R+M Nr.	P	I
518 19	500 bar	22 mm
518 39	500 bar	25 mm
518 49	400 bar	26 mm
518 59	400 bar	34 mm
518 559	250 bar	36 mm



Sechskant. Stahl verzinkt

IG : IG
1/4" : 1/4"

R+M Nr.	P	I
518 32	400 bar	25 mm




Rund. Edelstahl

R+M Nr.	P	I
519 009	500 bar	25 mm

Doppelnippel reduziert

Außengewinde : Außengewinde

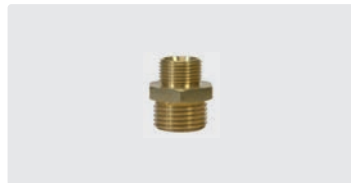

Messing

AG : AG
1/8" : 1/4"
1/8" : 3/8"
1/4" : 3/8"
1/4" : 1/2"
3/8" : 1/2"
3/8" : 3/4"
1/2" : 3/4"
3/4" : 1"

R+M Nr.	P	I
570 20	400 bar	22 mm
570 30	400 bar	23 mm
570 50	400 bar	24 mm
570 60	400 bar	27 mm
570 80	400 bar	27 mm
571 00	250 bar	34 mm
571 20	150 bar	38 mm



Edelstahl

R+M Nr.	P	I
570 29	500 bar	29 mm
570 39	500 bar	30 mm
570 59	500 bar	33 mm
570 69	500 bar	37 mm
570 89	500 bar	40 mm
571 09	400 bar	43 mm
571 29	250 bar	45 mm



Stahl verzinkt

R+M Nr.	P	I
570 28	500 bar	28 mm
570 38	500 bar	30 mm
570 58	500 bar	32 mm
570 68	500 bar	35 mm
570 88	500 bar	37 mm
570 858	400 bar	39 mm
571 08	400 bar	40 mm
571 28	250 bar	46 mm

Symbole IG Innengewinde AG Außengewinde I Höhe P Druck